


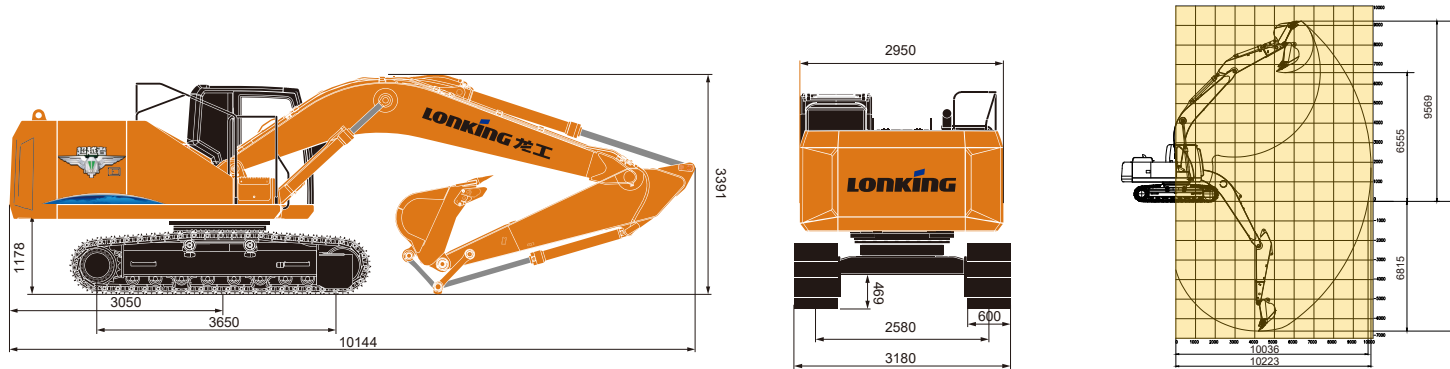

TECHNICAL PARAMETERS

Name		Data
Basic	Operating weight	25800 kg
	Boom length	5900 mm
	Arm length	2950 mm
	Standard bucket	1.3 m³
	Max.Travel speed	3.5/5.6 km/h
	Max.Swing speed	11.1 rpm
	Grade ability	35°(70%)
	Ground pressure	53.6 kPa
	Max.Traction force	211 kN
Engine	Engine model	QSB6.7-C190-31
	Rated power	145 kW/2050 rpm
	Max.Torque	931/1300 N.m/rpm
	Displacement	6.7 L
	Fuel tank	480 L
Hydraulic	Max.Flow(total)	260×2 L/min
	Max.Working pressure	34.3 Mpa
	Max.Pilot pressure	3.9 Mpa
	Max.Arm digging force	119/128 kN(ISO)
	Max.Bucket digging force	167/180 kN(ISO)
	Hrdraulic oil tank	115/190 L
Chassis	Track width	600 mm
	Track shoes number	49(each side)
	Carrier rollers number	2(each side)
	Track rollers number	9(each side)
Electric	System vollage	24 V
	Battery capacity	24 V,120 Ah×2

PRODUCT FEATURES

Cummins HPCR Electronically Controlled Engine. Stable & Reliable, Fuel-efficient
Three-stage Air & Fuel Filtering System
Adopt Independent Cooling System to Reduce Power Loss and Noise
Advanced Positive Control System, More Accurate Control & Higher sensitivity
8 inch LCD Display with Multi Purpose
Camfortable ROPS Cabin with 2.7m³ Operational Space
No Frame Cab Glasses to Enlarge Operation Field of View
Heavy-duty Working Device with High Strength Low Alloyed Steels

OPTIONAL

Breaking hammer & pipeline
Work warning light
Walking alarm
MP3
Top protecting net
Front protecting net
700mm triple grouser shoes
800mm triple grouser shoes
Track rubber block
Quick coupler pipeline

Lonking 龙工

CDM6245F HYDRAULIC EXCAVATOR

Perfect Quality, High Benefit



For more information on Lonking products,
Please contact our local agent:

The following blank can be used for notes or comments.

Lonking (Fu Jian) International Trade Co., Ltd.

Lonking Holdings Limited

Add:26 Minyi Road,Xinqiao,Songjiang Industrial Zone,Shanghai

Tel: +86-21-3760 2242

E-mail:export@lonking.cn

<http://www.lonkinggroup.com>

OPERATING WEIGHT:	25800kg
ENGINE POWER:	145kW
BUCKET CAPACITY:	1.3m³
TRAVEL SPEED:	3.5/5.6 km/h